



SAFETY SYSTEMS

- Intake air control system
- High pressure switch
- Manual discharge valve
- Integrated check valve on the air outlet line
- Belt pulley housing grill
- Outlet pressure manometer
- High pressure relief valve

OTHER FEATURES

- Automatic discharge system for loadless start
- Bearings with a long service life
- Outlet air cooling radiator
- Loaded-Unloaded operating options

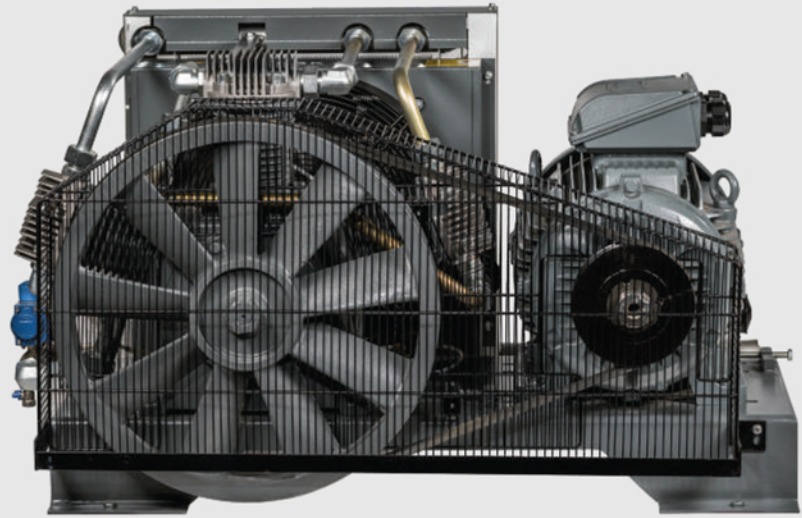

- Air suction filter and silencer for unloaded operation
- Lubrication system with whisking rod
- Oil level gauge
- Special discharge system preventing oil leakage from blowdown valve

OPTIONS : UA Smart Controller For Multiple Sequencing Units Arrangement And Energy Efficient Improvements.

TECHNICAL DATA

Model	Pressure				Capacity (intake)						Motor Power kW/HP	Connection Size	Dimensions (mm)			Weight kg
	Minimum		Maximum		7 bar (inlet)		10 bar (inlet)		13 bar (inlet)				Length	Width	Height	
	bar	psi	bar	psi	m ³ /min	cfm	m ³ /min	cfm	m ³ /min	cfm						
UABS BOOSTER 10	15	218	40	580	2,10	74	2,89	102	3,67	130	7,5/10	G 1"	1286	825	753	268
UABS BOOSTER 15	15	218	40	580	2,45	87	3,37	119	4,29	152	11/15	G 1"	1286	825	753	285
UABS BOOSTER 20	15	218	40	580	3,71	131	5,10	180	6,49	229	15/20	G 1"	1357	820	758	300
UABS BOOSTER 25	15	218	40	580	4,90	173	6,73	238	8,57	303	18,5/25	G 1 1/4"	1423	874	736	345
UABS BOOSTER 30	15	218	40	580	5,56	196	7,65	270	9,74	344	22/30	G 1 1/4"	1423	881	736	390
UABS BOOSTER 40	15	218	40	580	6,68	236	9,18	324	11,68	413	30/40	G 1 1/4"	1423	972	736	426

- Ultra Air (UA) reserves its rights to make changes in its products and specifications without prior notice.