




PNEUMATIC STRAPPING TOOL FOR POLYPROPYLENE AND POLYESTER STRAP WITH VIBRATION SEALING

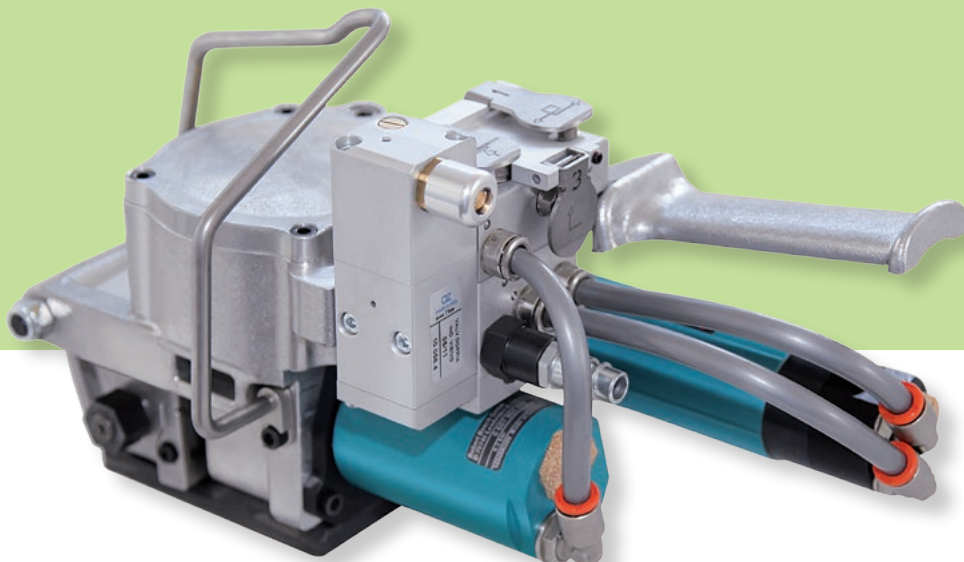

New cooling welding time indicator



TECHNICAL SPECIFICATIONS

DIMENSIONS

Length	300 mm • 11"
Width	150 mm • 6,3"
Height	175 mm • 6.9"
Weight	5.8 Kgs • 12.8 lbs

FEEDING

Pressure range	6 - 7 bar / 87-99 psi
Air consumption	14 L/s - 29 cuft/min

PERFORMANCE


Max. tension force	5000N (T149953) 6000N (T142533)
Tensioning speed	6 mt/min 5000N 4 mt/min 6000N
Sealing	Vibration sealing
Joint strength	80% of breaking strength*

* variable according to strap type

MODEL

CODE	TYPE	STRAP	THICKNESS
T142533	ITA14 - 25 mm 1"	PET 25mm - 1"	0.8mm 0.028" - 1.27mm 0.05"
T149953	ITA14 -25/32mm 1" - 1½"	PET 25/32mm 1" - 1½"	0.8 mm 0.04" - 1.27 mm 0.050"

POLYESTER STRAP



POLYESTER STRAP

